

B&B SachsenElektronik GmbH  
Leipziger Str. 40  
09648 Mittweida  
Germany


Phone +49 3727 6297 0  
Fax +49 3727 6297 24  
[info@sensolute.com](mailto:info@sensolute.com)  
[www.sensolute.com](http://www.sensolute.com)

## **DATASHEET**

### **Micro Vibration Sensor** **MVS0608.02L**

Revision 1.3

2026-01-22



MVS0608.02L

## DESCRIPTION

The micro vibration sensor is used for the detection of slight movements and vibrations by means of a mobile micro sphere. The ball bridges two contacts reducing the resistance between the two external connection pads from several mega ohms ( $> 30 \text{ M}\Omega$ ) to below 100 Ohms. The sensor is fully passive, requires no signal conditioning, and operates with currents as low as 0.2  $\mu\text{A}$ .

With the aid of tool-specific evaluation electronics, the micro vibration sensor controls the operation of movement-sensitive devices. The micro vibration sensor is utilised for converting many systems to environmentally friendly devices by implementing wake-up and power-down logic to conserve battery power and bringing energy consumption to a minimum, pushing the availability of green technology and green electronics into new areas of design and application.

The sensor is typically used for applications such as bike computers, remote controls, electronic lock systems, RFiD transponders, GPS tracking systems, wireless sensor networks, illuminated dog's collars, access control systems, data loggers, bicycle lights, that are only switched on when in motion.

## FEATURES

- Omnidirectional vibration sensor
- Wide supply voltage range: 1.80 V to 15 V
- Low operating current
  - (e.g.  $I_{\text{cc}}$  max. 0.2 $\mu\text{A}$  at  $V_{\text{cc}}$  2V and  $R$  10Meg)
  - (e.g.  $I_{\text{cc}}$  max. 2.0 $\mu\text{A}$  at  $V_{\text{cc}}$  2V and  $R$  1Meg)
- Noiseless
- $R_{\text{On}} < 100 \Omega$
- Protected against environmental stress
- Automated SMT-mounting
- RoHS compliant, lead free
- Specified from -20 °C to +70 °C
- Size 2.85 mm x 2.45 mm x approx. 1.5 mm
- Reacting point: approx. 50 mg

## APPLICATIONS

- Motion detection
- System wake up – low power

## MATERIAL

Package:	PCB laminate material
Inner contact material:	Gold plated
Micro Ball:	Gold plated

## Index

1. Operating Conditions .....	4
2. Soldering Process .....	4
3. Functionality .....	4
4. Qualification .....	5
5. Package mechanical data .....	6
5.1    Package outline .....	6
5.2    Footprint .....	6
6. Ordering information .....	7
6.1    Reel (standard-packing) .....	7
7. Important Notice .....	8

## 1. Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNIT
Supply voltage	V <sub>cc</sub>	+1.80	+15	V <sub>dc</sub>
Current	I <sub>cc</sub>		2	mA
R Open	R <sub>o</sub>	-	> 30	MΩ
R Closed	R <sub>c</sub>	< 100	-	Ω
Operating ambient temperature	T <sub>amb</sub>	-20	+70	°C

\* Current consumption is determined by the resistance of the application circuit and the supply voltage. The sensor is fully passive, requires no signal conditioning, and operates with currents as low as 0.2 μA.  
 (e.g. max. I<sub>cc</sub> 0.2μA at V<sub>cc</sub> 2V and R 10Meg)  
 (e.g. max. I<sub>cc</sub> 2.0μA at V<sub>cc</sub> 2V and R 1Meg)


## 2. Soldering Process

Reflow Soldering Process 260°C, 10 sec

## 3. Functionality

A mobile, gilded micro sphere is located inside the hollow space of the sensor. When moving, the micro sphere bridges two gilded contacts by switching over from a high resistive to a low resistive state. When the Sensor is at rest, it is **not necessarily closed**. Only in 70% - 99% of time the sensor will be closed when at rest.

The figure shows the typical characteristics of the sensor in excitation and rest.

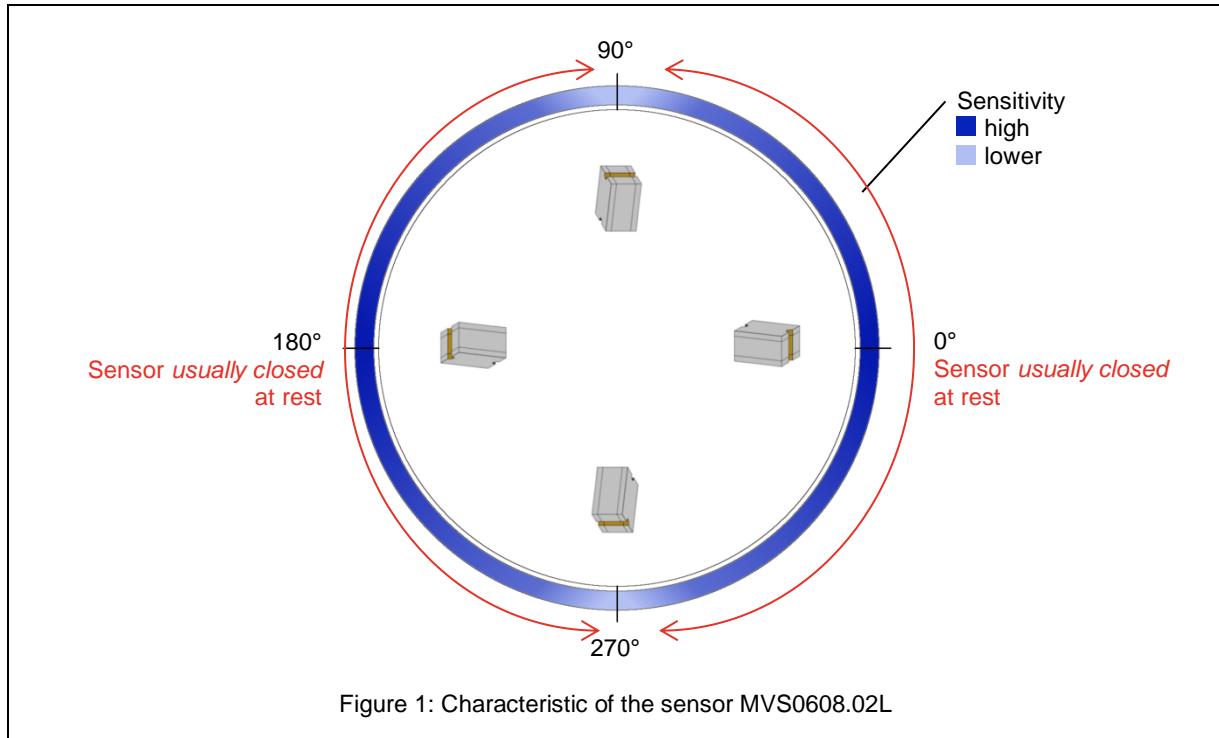

## 4. Qualification

### High temperature and high humidity storage

Test time: 48h  
Test temperature: 50°C  
Humidity: 90%  
without condensation  
no evidence of internal corrosion after the test.

### High humidity storage

Test time: 96 h  
Test temperature: 40°C  
Test humidity: 95%  
no evidence of internal corrosion after the test.  
no shape distortion

### Temperature cycle storage

Test cycle: 8 cycles, T1 = 65°C for 6h, T2 = -20°C for 6h,  
temperature change rate = 3K/min  
no evidence of internal corrosion after the test.  
no shape distortion

### Non Operation Half Sine Shock

Test cycle: Acceleration 25g at 6msec pulse width  
1000 cycles pos. 1000cycles neg.; 1Shock/s; 3 axis: X, Y, Z

### Non Operational Vibration Test

Test cycle: Sinus 10 ... 300Hz; Elongation 0.25mm / 0.25g; 5 cycles; 1 axis  
Frequency area A: 10 – 22.28Hz, amplitude in A:0.25 mm  
Frequency area B: 22.28 - 300Hz, acceleration in B: 0.25g  
Sweep speed: 1 Octave/min, Cycles: 10  
Time per Sweep: 4.9 min

### Non Operational Vibration Test

Test cycle: Sinus 10 ... 500Hz; Elongation 3.0mm / 1.5g; 5 cycles; 1 axis  
Frequency area A: 10 – 15.76Hz, Amplitude in A: 3.0mm  
Frequency area B: 15.76 - 500Hz, Acceleration in B: 1.5 g  
Sweep speed: 1 Octave/min, Number of sweeps: 10  
Time per Sweep: 5.62 min

## 5. Package mechanical data

### 5.1 Package outline

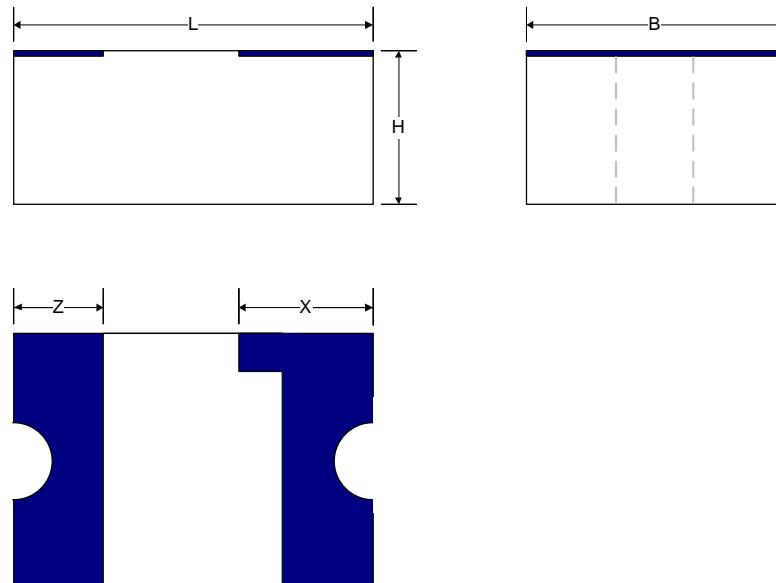


Figure 2: Package outline (drawing not to scale)

#### DIMENSIONS (mm)

Symbol	Value (mm)	Tolerance
L	2.850	$\pm 0.125$
H	1.700	$\pm 0.125$
B	2.450	$\pm 0.125$
Z	0.675	$\pm 0.125$
X*	1.055	$\pm 0.125$

\*Depending on the sensor orientation in the SMD belt, the flag can be on the right or left side.

### 5.2 Footprint

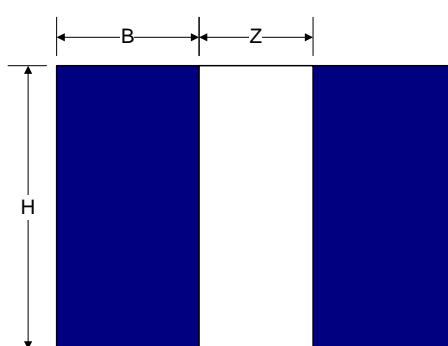


Figure 3: Recommended footprint (drawing not to scale)

#### DIMENSIONS (mm)

Symbol	Value (mm)
H	2.80
B	1.40
Z	1.00

## 6. Ordering information

### 6.1 Reel (standard-packing)

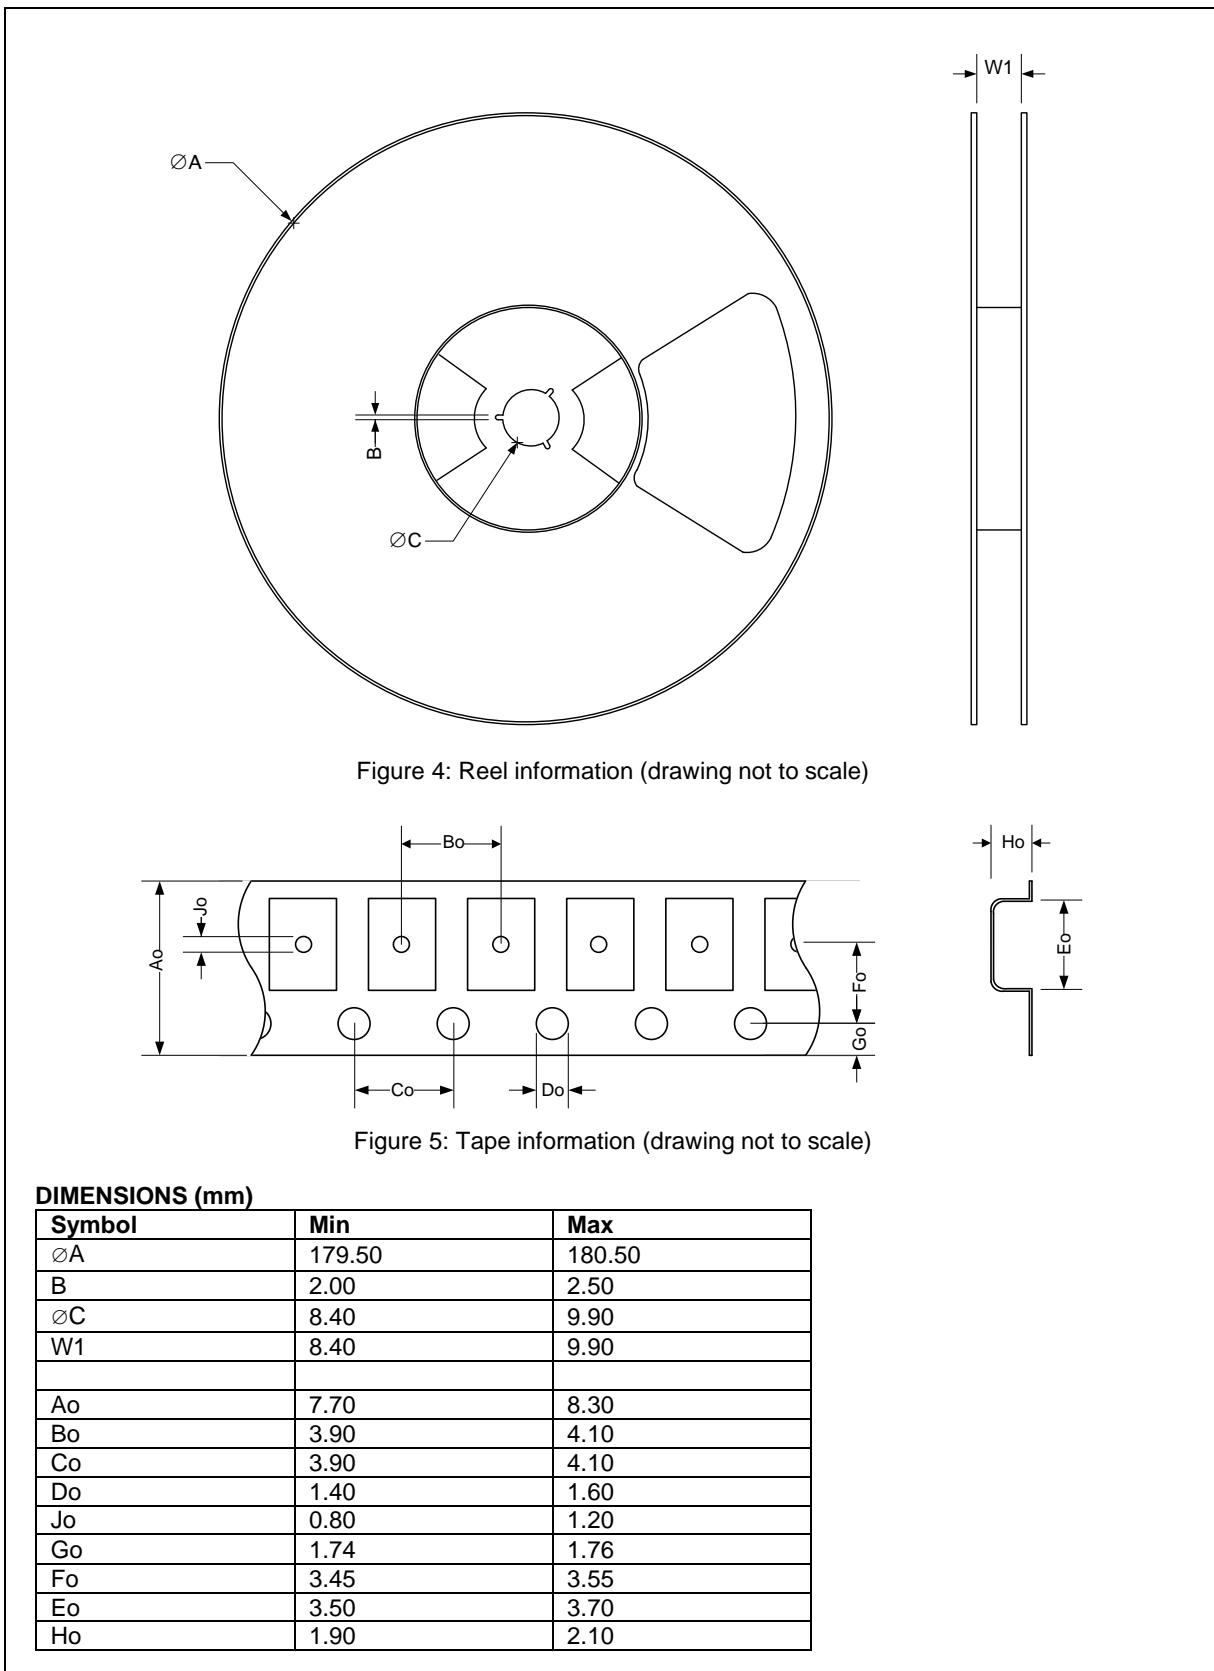


Figure 4: Reel information (drawing not to scale)

Figure 5: Tape information (drawing not to scale)

#### DIMENSIONS (mm)

Symbol	Min	Max
$\varnothing A$	179.50	180.50
B	2.00	2.50
$\varnothing C$	8.40	9.90
W1	8.40	9.90
Ao	7.70	8.30
Bo	3.90	4.10
Co	3.90	4.10
Do	1.40	1.60
Jo	0.80	1.20
Go	1.74	1.76
Fo	3.45	3.55
Eo	3.50	3.70
Ho	1.90	2.10

## 7. Important Notice

B&B Sachsenelektronik GmbH reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

Information furnished by B&B Sachsenelektronik GmbH is believed to be accurate and reliable. However, this document may contain errors and omissions.

B&B Sachsenelektronik GmbH assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using B&B Sachsenelektronik GmbH components. Accordingly, the design engineer should use this document as a reference rather than a strict design guideline and should perform thorough testing of any product that incorporates this or any other B&B Sachsenelektronik GmbH product.

B&B Sachsenelektronik GmbH products are not authorized for use in safety-critical applications (such as life support) where a failure of the sensors would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use.

No license is granted by implication or otherwise under any patent or patent rights of B&B Sachsenelektronik GmbH. Trademarks and registered trademarks are the property of their respective companies.

On the following URL you can obtain information on other B&B Sachsenelektronik GmbH products and application solutions:

[www.sensolute.com](http://www.sensolute.com)

**Mailing Address:**

B&B Sachsenelektronik GmbH  
Leipziger Str. 40  
09648 Mittweida  
Germany